


## PreSet Series Scaled Adjustable Current Switches

Safe "PreSet" Calibration: Match Dial to Motor Nameplate  
No Tools, No Energized Enclosures for Install  
Prevent Call Backs, Eliminate Set-Point Guesswork

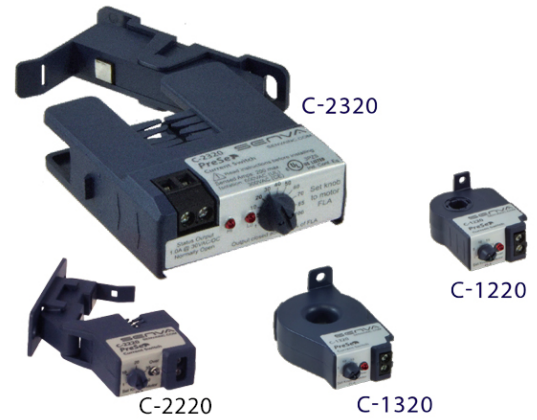

### DESCRIPTION

PreSet™ allows for matching sensor set-point to the motor nameplate, eliminating the need to calibrate in energized enclosures and reducing installation time. The sensor will detect motor undercurrent conditions such as belt loss, coupling shear, and mechanical failure on fans and pumps.

### APPLICATIONS


- Proof of Flow
- Detecting belt loss
- Detecting coupling shear and mechanical failure
- Monitoring status of critical motors



*Just set to motor full load amps for proof of flow. Simple and safe.*



*Optional CR command relay for stop/start/status in a single labor saving device.*




*Adjust knob on sensor to motor full load amperage (FLA) indicated on nameplate*



*No need to calibrate in live enclosures. Reduce risk of arc flash exposure.*

*Never calibrate in live enclosures again. Reducing risk of an arc flash exposure.*

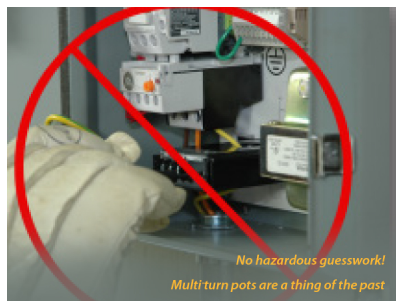

*No hazardous guesswork! Multi turn pots are a thing of the past*

*No hazardous guesswork. Multi-turn pots are a think of the past.*



*Proven 1/2 hour savings per install over manually calibrated devices.*

## FEATURES

- Adjustable set-point by matching dial to motor full load amps (FLA) nameplate
- Eliminates calibration in energized enclosures, reduces arc flash hazard
- Third-party validated to save up to 1/2 hour per current sensor install
- Prevents call-backs, no multi-turn potentiometers, and guesswork to find set-point
- A super low turn-on for compatibility with smaller motors
- Solid-state-more reliable than mechanical pressure switches for proof of flow
- Quality backed by a 7-year limited warranty
- Patented

## ORDERING

SPLIT CORE	Range (Amps)	Max Amps	Sensor AP	N.O. Output	Trip LED	Power LED
C-2320-L	0.45A	50A	0.75"	1.0A@30VAC/DC	•	•
C-2320	0.50A	100A	0.75"	1.0A@30VAC/DC	•	•
C-2320-H *	0.50A	150A	0.75"	1.0A@30VAC/DC	•	•
C-2320HV	0.50A	100A	0.75"	0.2A@120VAC	•	•
C-2320HV-L	0.45A	50A	0.75"	0.2A@120VAC	•	•
<b>SPLIT CORE - MINI</b>						
C-2220	1.00A	50A	0.375"	1.0A@30VAC/DC	•	
<b>SOLID CORE</b>						
C-1320	0.75A	50A	0.5"	1.0A@30VAC/DC	•	
<b>SOLID CORE - MINI</b>						
C-1220-L	0.75A	5A	0.3"	1.0A@30VAC/DC	•	
C-1220	0.75A	50A	0.3"	1.0A@30VAC/DC	•	
C-1220HV-L	0.75A	5A	0.3"	0.2A@120VAC	•	
C-1220HV	0.75A	50A	0.3"	0.2A@120VAC	•	

## COMMAND RELAY - DIRECT MOUNT (MOUNTS ON ALL 2300 SERIES CURRENT DEVICES)

	Contact rating	Coil
CR3-24	N.O. 10A @ 125VAC	24VAC/DC 15mA nominal
CR4-24	N.C. 10A @ 125VAC	24VAC/DC 15mA nominal
CR3-12	N.O. 10A @ 125VAC	9-12VDC 30mA nominal
CR4-12	N.C. 10A @ 125VAC	9-12VDC 30mA nominal

Other coil voltages available—consult factory


**Ordering tip:** For best resolution, choose the sensor lowest maximum amperage which accommodates your motor (e.g. 0-50A us -L, 50-100A use standard, 100 to 150A use -H)

\* Now with a new, lower turn on setting!



## DIMENSIONS

**SPLIT CORE  
C-2320**



L: 2.5" H: 0.57" W: 2.23"  
A: 0.75" x 0.75"

- Mount sensor without removing conductor for installation savings
- Clamp on conductor with iris, or use detachable base to screw or DIN mount
- Larger 0.75" aperture accommodates oversize conductors

**OPTIONAL RELAY  
for additional labor savings**



L: .84" H: .72" W: 2.06"

- Add to 2320 series to get start/stop/status in a single device
- Reduces the number of installed components... saves time and space
- Removable relay facilitates service

**SPLIT CORE - MINI  
C-2220**



L: 2.00" H: .75" W: 1.75"  
A: .040" x 0.32"

- Mount sensor without removing conductor for installation savings
- Fits in small enclosures
- Clamp on conductor with iris, or screw mount detachable base

**SOLID CORE  
C-1320**



L: 2.40" H: 1.04" W: 1.6"  
A: 0.52" diameter

- Compact design
- Aperture accommodates spade terminals

**SOLID CORE - MINI  
C-1220**



L: 1.91" H: .88" W: 1.31"  
A: 0.30" diameter

- Super small—fits anywhere
- Low cost

**Warning:** The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

## SPECIFICATIONS

Standard Output Rating	1.0A@30VAC/DC
Line Voltage Output Rating	0.2A@120VAC (-HV ONLY)
Output Type	NO, solid-state FET
Environmental Rating	5-140 °F (-15-60 ° C) 10-90% RH Non-condensing
Insulation Class	600V RMS. For use on insulated conductors only! Use minimum 75 ° C insulated conductor
Sensor Power	Induced
Frequency Range	50/60Hz, On/Off status for Variable Frequency Drive outputs at 12 to 115Hz

*\* Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.*