

TG Series UL Wall & Duct Dual Combustible Gas Sensor/Controller

UL2075 recognized combustible gas sensing elements
Individual sensors or as any dual combination of gases
Detect Methane/Propane leaks and monitor for elevated CO levels
NEW! Fail-Open relay version, for integration into fire control panels



DESCRIPTION

Senva TG Series sensors can be ordered as individual CH₄ sensor, C₃H₈ sensor, H₂ sensor, O₂ sensor, H₂S sensor, or specify two sensing elements in one enclosure including CO and NO₂. The analog output model features 2 outputs that support daisy chain wiring - multiple sensors may be used in a parallel sequence (0-10V) for cost effective coverage of large areas. The unit can also act as a stand alone controller, utilizing the relay for exhaust fan operation or the output for direct control of a VFD. Order the NEW fail-open relay version for streamlined integration into fire control panels. The BACnet/Modbus model supports BACnet MS/TP & Modbus network communication in one unit. Standard features include network auto-configuration, a programmable two-staged relays, LED indicators, integrated display and audible alarm.

APPLICATIONS


- Boiler rooms
- Commercial kitchens
- Battery Rooms
- Battery Energy Storage Systems (BESS)
- Compressed Gas storage
- Residential and commercial heating and water heating
- Vehicle bays and garages for natural gas (LNG) or petroleum gas (LPG) vehicles
- Waste facilities




NEW! TG-REM kit - mount CO and NO₂ at different heights; same functionality as a single device



TG ABS Enclosure - Available with Tinted or Solid Lid Options



Two sensing elements, buzzer, three color LEDs, and LCD for setup and calibration

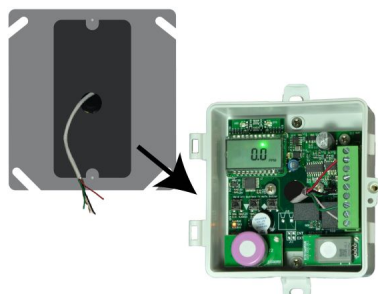

Through-back hole allows for streamlined installation in a junction box




ABS version comes with handy conduit box adapter



Buy American Act Certified

FEATURES

- NEW! UL2075 Recognized Propane and Methane elements
- Order standard relay for direct fan control or (NEW!) fail-open version for integration into fire panels
- Integrated display, LED indicators, audible alarm
- Menu selectable 0-5/10V, 1-5V and 4-20mA outputs (0-10V default)
- BACnet supports BACnet MS/TP and Modbus RTU networks with auto-configuration for network baud rate, serial format, protocol type and self-addressing
- Dual outputs support daisy chain wiring to cost-effectively sense and control large areas
- UL2075 recognized catalytic sensing element
- Warning indicators alert occupants when element's lifecycle is near end for replacement
- Installer-friendly circuit board makes through-the-back wiring simple
- Test mode speeds up field commissioning for verifying warning indicators and relay functions
- Push buttons and LCD to navigate setting parameters
- UL Listed (UL61010-1)
- Compliant with NFPA 111, NFPA 820, and NFPA 1, Fire Code, Chapter 38.6
- 7-year limited warranty on electronics; 2-year on elements
- Sense in two locations
- Plug-and-play; provided with pre-cut CAT-5 cable
- Single power source, single location for RS-485/analog/relay connections
- Single BACnet device; reduce devices/points on your network
- Through-the-back wiring makes junction-box-mounting easy
- No programming necessary
- Order dual hydrogen sensors - great for modular battery energy storage system

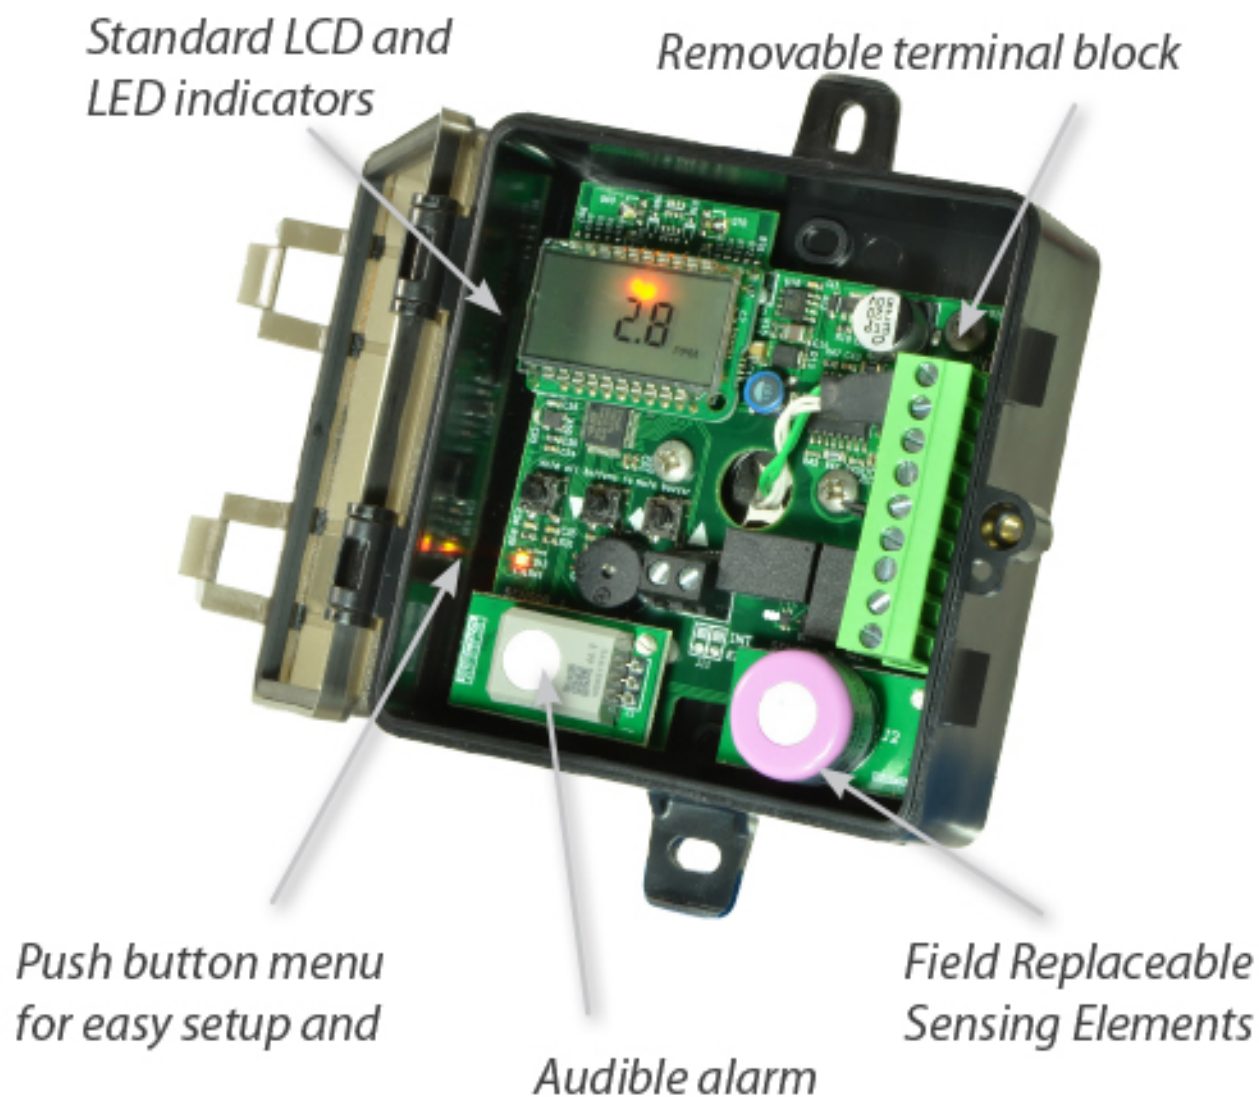

ORDERING

TG
-

Package
W = Wall Mount
D = Duct Mount
M = Metal

Output Type
A = Analog
B = BACnet/Modbus

Gas Type 1*
C = Carbon Monoxide (CO)
N = Nitrogen Dioxide (NO₂)
D = Carbon Dioxide (CO₂)
E = Dual Channel CO₂
M = Methane (CH₄)
P = Propane (C₃H₈)
H = Hydrogen (H₂)
O = Oxygen (O₂)
S = Hydrogen Sulphide (H₂S)
A = Ammonia (NH₃)
2 = R22
4 = R410A (Mulsti-Gas)
5 = R404A
6 = R407C
7 = R449A
8 = R513A
9 = 1233ZDE

Gas Type 2*
X = No second gas
N = Nitrogen Dioxide (NO₂)
D = Carbon Dioxide (CO₂)
E = Dual Channel CO₂
M = Methane (CH₄)
P = Propane (C₃H₈)
H = Hydrogen (H₂)
O = Oxygen (O₂)
S = Hydrogen Sulphide (H₂S)
A = Ammonia (NH₃)

Temperature
A = None
C = 100Pt RTD
D = 1000Pt RTD
E = 10K Type 2
F = 10K Type 3
G = 10k w/11k
H = 3k
I = 2k2
J = 1k8
K = 20k

Options
Blank = None
S = Solid/Opaque Lid
W=White/Solid Lid
F = Fail Open Relay

*Refrigerant sensors may not be paired with CH₄, C₃H₈, or H₂, or paired together.

Replacement Elements
TGS-CO-ULV2 = Carbon Monoxide
TGS-NO₂-ULV2 = Nitrogen Dioxide
TGS-CH₄-ULV2= Methane
TGS-C₃H₈-ULV2 = Propane
TGS-O₂-ULV2 = Oxygen
TGS-H₂-ULV2 = Hydrogen
TGS-H₂S-ULV2 = Hydrogen Sulfide
Call for more options


TG
-
REM
-

Package
W = Wall Mount
M = Metal

Cable Length
5 = 5 feet
10 = 10 feet
15 = 15 feet
20 = 20 feet

^TG-REM is a kit only and does not include gas sensing element. Purchase TGS sensor or dual-element TG separately.

DIMENSIONS

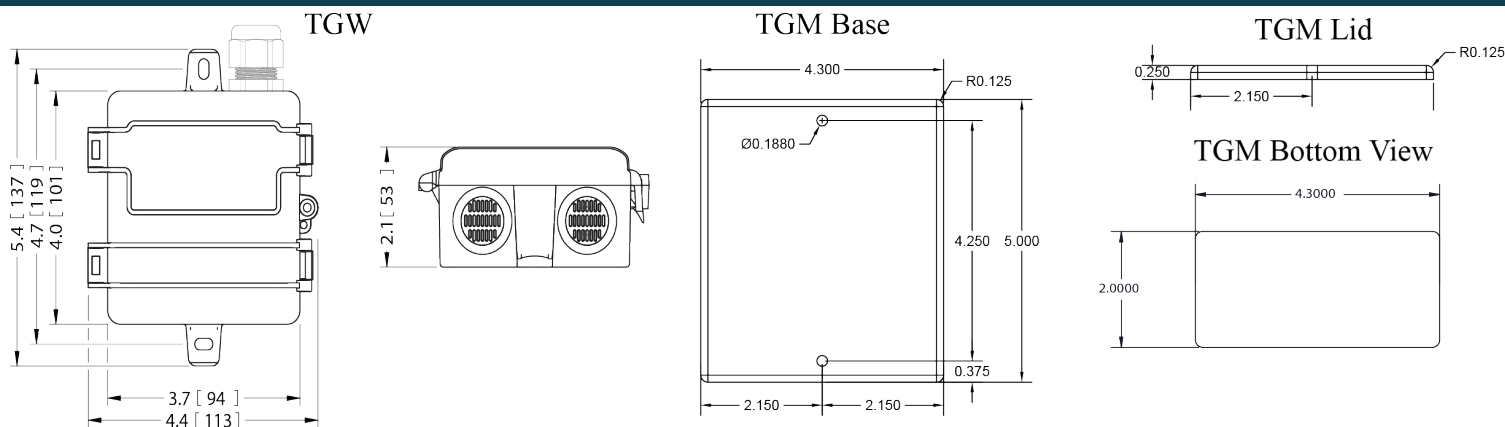

Warning: The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

SPECIFICATIONS

Power Supply		15-30VDC/24VAC(1), 4W max, 160mA max.
Wiring	TG-REM	Powered through CAT-5 cable, no separate power required.
	Conductor	14-24 AWG, Minimum 600V, 75°C
	Terminal Torque	0.5 N-m
Analog Outputs	2 programmable outputs	0-10V (default), 0-5V, 1-5V, 4-20mA (menu selectable)
	CO Output Scaling	0-200ppm (default), 0-1000ppm (menu selectable)
	NO ₂ Output Scaling	0-10ppm (default), 0-30ppm (menu selectable)
	CO ₂ Output Scaling	0-10,000ppm (default), 0-10,000 (menu selectable)
	Propane/Methane / Hydrogen Output Scaling	0-50% LEL (default), 0-50% LEL (menu selectable)
	Oxygen Output Scaling	0-25% Vol (default), 0-25% Vol (menu selectable)
	Refrigerant Output Scaling	0-1000ppm (default), 0-1000ppm (menu selectable)
	H ₂ S Output Scaling	0-100ppm (default), 0-100ppm (menu selectable)
	Ammonia NH ₃ Output Scaling	0-100ppm (default), 0-100ppm (menu selectable)
	Temperature Output Scaling (optional)	-20° to 85°C
BACnet /Modbus	Protocol RS-485	BACnet MS/TP, Modbus RTU, Modbus ASCII
	Baud Rates	9600, 19200, 38400, 57600, 76800, 115200
	RS-485 Loading	1/4 unit
Fan Relay	Fan relay characteristics (Standard Version)	N.C. 1A@24/30VDC (50/60Hz) (no mains connection)
	Fan relay characteristics (Fail-Open Version)	N.O. 1A@24/30VDC (50/60Hz) (no mains connection)
Alarm Relay	Alarm relay characteristics (Standard Version)	N.C. 1A@24/30VDC (50/60Hz) (no mains conenction)
	Alarm relay characteristics (Fail-Open Version)	N.O. 1A@24/30VDC (50/60Hz) (no mains conenction)
Display	3-1/2 digit LCD	Indicates CO ppm, NO ₂ ppm, Temp (menu selectable)
LEDs	Green, Yellow, Red	Green = Normal, Yellow = Relay, Red = Alarm
Audible Alarm	85dB Piezo transducer	30 minutes above alarm setpoint (menu selectable)
CO Sensor Performance ⁽⁴⁾	Type	Electrochemical
	Accuracy	±5% of Default Range, ±5% of Reading Above 200 ppm

	Resolution	1 ppm
	Certifications	UL2075 Recognized component
	Life Expectancy	7 years
	Recommended Calibration	Annual
	Recommended Height and Coverage Area	3 to 6 feet, coverage 5000 to 7500 sq. ft.
NO ₂ Sensor Performance ⁽⁵⁾	Type	Electrochemical
	Accuracy	±5% of Default Range, ±5% of Reading Above 20 ppm
	Resolution	0.1 ppm
	Certifications	UL2075 Recognized component
	Life Expectancy	7 years
	Recommended Calibration	Annual
	Recommended Height and Coverage Area	3 to 6 feet, coverage 5000 to 7500 sq. ft.
Oxygen Sensor Performance	Type	Electrochemical
	Detection Range	0-25% Volume
	Accuracy	±5% of range
	Resolution	0.1%
	Life expectancy	5 years, with Annual Calibration
	Recommended Calibration	Annual
	Recommended Height and Coverage Area	3 to 6 feet off the ground; coverage of 5000-7500 square feet
Ammonia Sensor (NH ₃) Performance	Type	Electrochemical
	Accuracy	±5% of default range
	Resolution	0.1 ppm
	Life expectancy	5 years
	Recommended Calibration	6 months
	Recommended Height and Coverage Area	0.5 to 1 foot from ceiling; coverage 5000-7500 square feet (Click for details)
Carbon Dioxide (CO ₂)	Type	Non-Dispersive Infrared (NDIR)
	Accuracy ⁽⁶⁾	±(30ppm +3% of reading) (400-2000ppm), @-10-50°C ±(50ppm +5% of reading) Standard (2000-5000ppm), @-10-50°C ±(50ppm +3% of reading) Dual Channel (2000-5000ppm), @-10-50°C ±(100ppm +10% of reading) (5000-10000ppm), @0-50°C
	Drift with ABC disabled ⁽⁷⁾	35 ppm/month ⁽⁸⁾ (Standard), 5 ppm/month ⁽⁸⁾ (Dual Channel)
	Range	0-2000/5000 ppm; Programmable up to 10,000 ppm
	Resolution	1 ppm
	Life expectancy	15 years
	Response Time	30s
	Sample Response	1s
	Recommended Height and Coverage Area	3 to 6 feet, coverage 5000-7500 square feet (Click for details)
Methane/Propane/Hydrogen Sensors Performance	Type	Catalytic
	Detection Range	0-50% LEL (Lower Explosive Limit)
	Accuracy	5% of range
	Certifications	UL2075 Recognized Component for Methane and Propane
	Resolution	1%LEL
	Certifications	UL2075 Recognized Component

	Life expectancy	>5 years
	Response Time	<10s to 90%
	Recommended Calibration	Bump test annually, calibrate or replace if necessary. ⁽⁹⁾
	Long Term Stability Drift	Zero: <±2mV/year Sensitivity: <±2mV/month
	Recommended Height and Coverage Area	Methane/Hydrogen: Within 1 ft of ceiling
		Propane: 1-3 ft above finished floor;
		Coverage: Methane/Hydrogen 5000-7500 sq ft;
		Propane 5000 sq ft (Click for details)
Hydrogen Sulphide (H2S) Sensor Performance	Type	Electrochemical
	Detection Range	0-100 ppm
	Accuracy	±5% of Range
	Resolution	1 ppm
	Life expectancy	5 years with 6 month calibration
	Recommended Calibration	6 months
	Recommended Height and Coverage Area	3 to 6 foot above the ground; coverage of 5000-7500 square feet
Refrigerant Sensors Performance	Type	MOS
	Detection Range	0-1000 ppm
	Resolution	1 ppm
	R22, R134A, R410A, R404A, R407c	Calibrated for respective
	R134A Sensitivity ⁽⁷⁾	@300ppm test gas: 450 ppm R410A, 425 ppm R407C, 400 ppm R404A, 370 ppm R22, 300 ppm R134A
	Other Detectable Gases ⁽⁸⁾	R407A, R407F, R427A, R452B, R507, R448A, R454B, R455A, R455C, R422A, R422D, R452A, R514A, R32, Consult factory for other A2L gases
	Life Expectancy	10 years (typical expectation for MOS sensors)
	Recommended Calibration	6 months
	Recommended Height	6 inches above floor; no more than 18 inches above lowest level of equipment location for leak detection; coverage 5000-7500 sq ft.
Operating Environment	Temperature, Operational	-20 to 50°C (-4 to 122°F) (CO ₂ versions rated to -40°C)
	Humidity	15-95% continuous, 0-95% intermittent
	Max Elevation	2000m
Enclosure (Wall & Duct)	Material	ABS/Polycarbonate
	Dimensions	4.0"h x 4.4"w x 2.1"d
	Conduit Opening	Tapped 1/2" NPT
	Rating	IP43 or NEMA 3R
Enclosure (Metal)	Material & Enclosure Rating	Powder-coated steel/acrylic
	Dimensions	5.0"h x 4.3"w x 2.25"d
	Opening	Dual air vents on bottom of enclosure
	Mounting	Pre-drilled for 2x4" electrical box
	Rating	IP41 or NEMA 3R
Agency	Compliance	UL61010-1 Listed UL, cUL, CE, UL 2075 Recognized Propane/Methane/Hydrogen/Nitrogen Dioxide/Carbon Monoxide sensor

(1) One side of transformer secondary is connected to signal common. Dedicated transformer is recommended. No mains circuit connection allowed. In addition, it is required to use an isolated power supply that is certified by a national or international standard (i.e. UL). Use of a Class 2 LPS power supply or greater is required.

(2) R134A sensor is factory calibrated to R134A gas but may be used as a general-purpose refrigerant sensor. Sensitivity to some other gases can be found in the installation manual. Actual response may vary depending on installation. For more accurate response to a specific gas, a unit may be field calibrated.

(3) These gases may be detected by the sensor but sensitivity curves are not available at this time.

- (4) Carbon Monoxide full scale is 1000 ppm.
- (5) Nitrogen Dioxide full scale is 30 ppm.
- (6) CO₂ sensor is equipped with a heater to account for temperatures down to -40°C.
- (7) It is not recommended to de-activate ABC (auto-calibration) except for continuously occupied spaces or greenhouses. Drift ratings may vary based on environment.
- (8) Combination CO/Methane, CO/Propane, or CO/Refrigerant sensors should be mounted according to Propane/Methane/Refrigerant recommendations. Consult factory for other combinations. Mounting height recommendations may be adjusted according to installation. Ensure sensor is accessible for maintenance and target gas has unobstructed access to sensor. Mount in accordance with ANSI/NFPA 70 and NEC or CEC.
- (9) A bump test involves exposing the sensor to a reference gas and detecting the sensor's response. If sensor response is out of accuracy range, recalibration or replacement of the sensor element may be necessary.

** Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.*