

## TotalSense Series Duct Air Quality Sensor

Build a complete air quality system for indoor, duct, and outdoor  
Six environmental sensors: PMx, VOC, CO<sub>2</sub>, RH, T, barometric pressure  
BACnet/Modbus or analog outputs with set-point relay  
Pair with an IOTBuddy for BACnet IP or IOT Connection



### DESCRIPTION


The TotalSense Series Duct AQ sensor provides more data for more advanced ventilation control while drastically reducing installation cost and time on a project. It includes a comprehensive selection of AQ sensing with carbon dioxide (CO<sub>2</sub>), relative humidity (RH), and temperature plus options for total volatile organic compounds (TVOC), barometric pressure and particulate matter (PM).

### APPLICATIONS


- Measure duct air quality to validate filtration systems and deliver fresh air
- Verify effectiveness of IAQ strategies in post covid environment
- Energy management/building control
- Facilitates compliance with ASHRAE 62.1 standard for air quality
- Contributes toward satisfying Feature A08 and T06 under the WELL Building Standard®



Fully configurable display

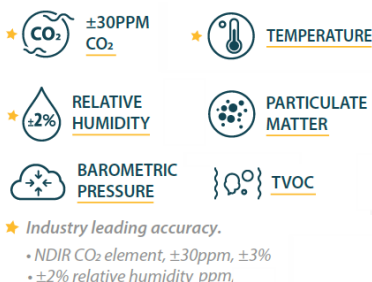

Choose up to 6 air quality indicators



Build a full validation system

### Built for building automation.



Available with analog or...



Replaceable CO<sub>2</sub>, RH, and temp sensors



RESET monitors are tested and certified for your RESET Air Projects

## FEATURES

- NEW! Configuration App with Senva Sync
- Reduce installation costs with multiple sensors in a rugged, easy-mount duct enclosure
- Specify the exact product for your application and made in USA
- Sense unhealthy particulates or TVOC's in your duct system
- Industry-leading temperature and barometric pressure compensated CO2 sensing with non-dispersive infrared sensing element (NDIR), 15+ year life expectancy on CO2 sensing element;  $\pm 30\text{ppm}$ ,  $\pm 3\%$  of reading
- Tamper-proof
- Field-replaceable RH, Temp, and CO2 sensors ease maintenance
- 7-year limited warranty / 3 years on CO2 sensor - 2 years on all others

## ORDERING

AQ2	<input type="text" value="D"/>	-	<input type="text" value="B"/>	<input type="text" value="C"/>	<input type="text" value="2"/>	<input type="text" value="V"/>	<input type="text" value="P"/>	<input type="text" value="F"/>	<input type="text" value="D"/>
<b>Mounting Type</b>	<b>Output Type</b>		<b>CO2 Sensor</b>	<b>Humidity Sensor (RH)</b>	<b>Total Volatile Organic Compounds (TVOC)</b>	<b>Particulate Matter (PM)</b>	<b>Temperature</b>	<b>Display</b>	
D = Duct Mount	A = Analog B = BACnet/Modbus		A = None C = CO <sub>2</sub> Sensor D = Dual Channel CO <sub>2</sub>	A = None 2 = 2% RH Sensor	A = None V = TVOC	A = None C = CO P = PM 1.0, 2.5, 4.0, 10.0 O = O <sub>3</sub> ** Q = PM + O <sub>3</sub> ** R = PM + CO*	A = None B = Transmitter C = 100PtRTD D = 1000PtRTD E = 10K Type 2 F = 10K Type 3 G = 10K W/ 11K H = 3K I = 2K2 J = 1K8 K = 20K	X = None D = OLED Display	

\* CO sensor only available with display for calibration purposes.

\*\* Ozone (O<sub>3</sub>) only available with Temp/RH for calibration purposes

\*\*\* Choose Transmitter option for OLED temperature display and temperature readings over BACnet/Modbus. Thermistor versions not available to display on OLED or to read over BACnet/Modbus.


### Example

Mount Output CO<sub>2</sub> RH TVOC PM Temp Display

AQ2  -

(TotalSense Duct mount sensor with BACnet/Modbus RS-485, Temp, CO<sub>2</sub>, 2% RH, VOC, PM, 10K Type 3 Temperature, OLED Display)

## DIMENSIONS

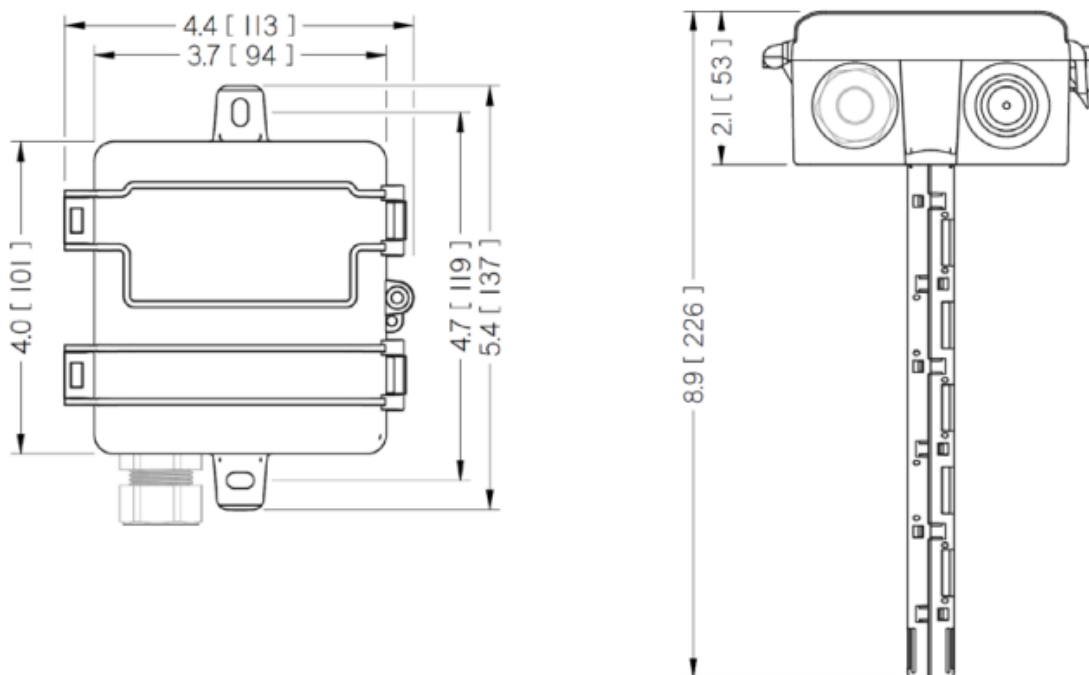

**Warning:** The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

## SPECIFICATIONS

Power Supply	Non-Display	16-30VDC/24VAC(1), 3.5W nominal, 4W max.
	Display or LED Ring	24-30VDC/24VAC(1), 4.3W nominal, 5W max.
Interface	OLED (optional)	1.5" Organic LED Display, 128x128, color
	Air Quality Ring	Color changing (red/yellow/green) LED Air Quality Ring
Analog Outputs (Analog or Dual version only)	Quantity	Up to 3 outputs
	Source	CO <sub>2</sub> , RH%, Temp, TVOC, PM, CO, Ozone (selectable)
	Scale	0-5V, 0-10V, 4-20mA (switch selectable, programmable per output)
Protocol Output (Comms or Dual version only)	Protocol	BACnet MS/TP or Modbus RTU
	Connection	3-wire RS-485, with isolated ground
	Data Rate	9600, 19200, 38400, 57600, 76800, 115200 (switch selectable)
	Address Range	0-127
Relay	Type	Solid-state output, 1A @ 30VAC/DC, N.O.
	Polarity	NO/NC (selectable)
	Source	CO <sub>2</sub> setpoint, RH setpoint, Temp setpoint, TVOC setpoint, PIR motion detection, Air Quality, off (selectable)
CO <sub>2</sub> (Optional)	Type	Non-dispersive Infrared (NDIR)
	Accuracy	±(30ppm + 3% of reading) (400-2,000ppm), -10-50°C, 0-85%RH
		±(50ppm + 5% of reading) (2,000-5,000ppm), -10-50°C, 0-85%RH
		>5,000ppm consult factory
	Resolution	1 ppm
	Range	0-2,000 PPM (Default) (Programmable up to 10,000ppm)
	Response time	90 seconds to 90% reading
	Sample rate	1s

Relative Humidity (Optional)	Temp and Pressure CompensationYes, barometric pressure readable over comms	
	Type	Digital CMOS
	Accuracy(2)	2% models, +/-2% over 0 to 80%RH range
	Resolution	0.05%RH
	Response time (3)	30s
	Sample rate	3s
	Operating range	0 to 100%RH (non-condensing)
	Operating conditions (4)	-4 to 140oF (-20 to 60° C) @ RH>90%; -4 to 176oF @ RH=50%
Temperature Transmitter (Optional)	Type	Silicon Band-gap
	Nominal Accuracy	±0.3° C (operating range)
	Maximum Accuracy (2)	±0.5° C (at 25° C), ±1.0° C
	Resolution	0.1° C
	Response time	30s
	Sample rate	3s
TVOC (Optional)	Type	MOS
	Gas	Total VOC
	Formaldehyde CH2O Sensitivity	Responsive to Formaldehyde concentrations 50-1000 ppb
	Range	0-32,000 µg/m3 (Display may be programmed to show PPB)
	Response Time	<10s
	Accuracy (5)	±20 µg/m3 + 15% at 1 to 500 µg/m3 (typical)
	Output	0-2,000 µg/m3 (default) programmable up to 32,000 µg/m3
PMx (Optional)	Type	Optical
CLASS 1 LASER PRODUCT	Size Range	PM1.0, PM2.5, PM4.0, PM10.0
	Scale	0-1,000 µg/m3
	Lower detection limit	0.3 µm
	Precision	±10 µg/m3 (0-100µg/m3); ±10% (100-1,000 µg/m3)
	Long-Term Drift	±1.25 µg/m3 / year
Carbon Monoxide	Type	Electrochemical
	Detection Range	0-200 ppm
	Accuracy	5% of reading
	Resolution	1 ppm
	Response Time	60 seconds
Ozone	Type	PMOS
	Ozone Detection Range	20-500 ppb
	Accuracy	±15% of FS @ 20° C
PIR (Optional)	Type	Passive Infrared
	Axis X field of view	140o, 15 ft (4.5m)
	Axis Y field of view	76o, 15 ft (4.5m)
Operating Environment	Temperature	32 to 122oF (0 to 50oC)
	Humidity	0-95% non-condensing
Enclosure	Material	ABS Plastic
	Dimensions	4.0"h x 4.4"w x 2.1"d (+6.8" probe)
Compliance	Agency	CE, RoHS

(1) One side of transformer, secondary is connected to signal common. Dedicated transformer is recommended.

(2) Models with PM sensor included achieve ±5% accuracy over 0 to 80%RH range and an additional temperature shift of up +0.5° C.

(3) Time for reaching 63% of reading at 25° C and 1 m/s airflow.

(4) Long term exposures to conditions outside normal range at high humidity may temporarily offset the RH reading (+3%RH after 60 hours).

(5) Wiring with silicone or other high VOC insulation will affect TVOC readings.

*\* Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.*