

P4 P5 Pressure Probe Duct/Static pressure probe

Gasketed to ensure a reliable seal and consistent readings Versatile duct, filter, or remote mounting Ideal for use with a Senva P4 or P5













DESCRIPTION

Senva's RP-6 ensures minimal turbulence for accurate and dependable readings. The gasketed tip allows for secure and easy mounting to any duct. It's industry standard barb accepts any 3/32 inner diameter tubing.

APPLICATIONS

- Building (zone) pressure
- · Filter condition measurement
- Duct/static
- OEM HVAC
- Meets 0.25% or 0.5% accuracy specs



Versatile probe and 6" long 1/16 tube



Probe transforms for duct or remote applications



Made in USA - 7 year warranty (probe only)

FEATURES

- 6" Duct/Static pressure probe
- Accepts any 3/32 ID tubing

- Easily add to any Senva P4 or P5 product
- · Versatile duct, filter, or remote mounting


ORDERING


RP-6 P4/P5 DUCT PROBE KIT

DIMENSIONS





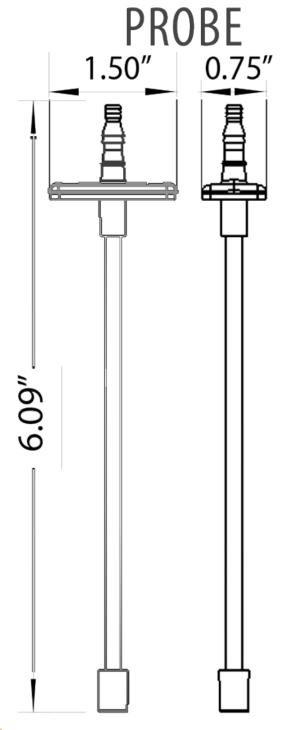





Warning: The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

| SPECIFICATIONS | | |
|---------------------|--------------|-----------------------|
| Media compatibility | | Dry, oil-free air, N2 |
| Agency | Compliance | CE, RoHS |
| Enclosure | Flammability | UL94 5VB |



| * Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring. | |
|---|--|
| | |
| | |
| | |