

HT10 Series Humidity/Temp Outdoor

2% or 3% accuracy (NIST certification options)
0-5V/10V and 4-20mA RH/Temp (thermistors optional)
LCD display with field calibration menu
Field replaceable element



DESCRIPTION


The HT10 Series is designed to be mounted on the building exterior to provide outside air RH measurement. The HT10 Series combines excellent stability with reliable operation in 2% or 3% RH accuracy options. Optional temperature transmitters, RTDs and thermistors add further flexibility when ordering. The standard LCD, gasketed lid and field replaceable elements make the initial installation and future service a breeze.

APPLICATIONS

- Replaceable element is ideal for difficult environments such as coastal areas or process control such as poultry farms
- Facilitating compliance with ASHRAE 62.1 standard for air quality
- Indoor air comfort and control in HVAC systems
- Maintain healthy air quality, minimize mold and other contaminants
- Design is ideal for greenhouse applications



Rugged Enclosure

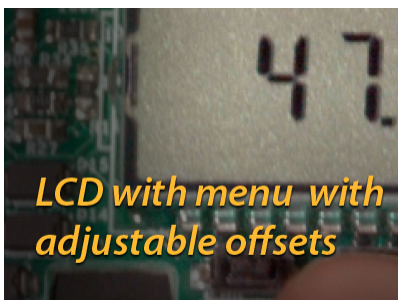


LCD with adjustable offsets menu



State of the art measurement and calibration



HT ribbon element for harsh environments

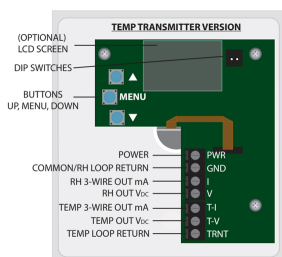

Options with temp transmitter version



Made in USA; 7 year warranty on electronics

FEATURES

- 2% or 3% RH versions with field replaceable sensor
- Switch selectable 5V/10V and 4-20mA RH/T transmitter outputs
- Thermistor outputs for temperature optional
- Field calibration. LCD and push-button menu allow easy adjustment of calibrated RH value as needed to maintain certification.
- Replace a sensor without disturbing conduit
- On-board temperature compensation for RH. Eliminates temperature coefficient errors and achieves an excellent measurement accuracy as well as high repeatability and offset stability.
- State-of-the-art testing facilities. Multi-point calibration certification options. Consult factory.
- Industry-leading 7-year warranty/ 2-year replaceable element warranty

ORDERING

HT10-			U	
Accuracy	Temperature	Output	Display (LCD)	
2= 2%	A= None	U= Universal	X= None	
3= 3%	B= Transmitter*	(4-20mA,	D=Display	
N= 2%/ with	C= 100PtRTD	0-5V,0-10V)		
NIST Cert.	D= 1000PtRTD	2 or 3-Wire		
	E= 10K Type 2	Connection		
	F= 10K Type 3			
	G= 10K W/ 11K			
	H= 3K			
	I= 2K2			
	J= 1K8			
	K= 20K			
	L= 100K			
	M= NTC			

* Order B=transmitter to display temperature reading; thermistor and RTD options will not display temperature on LCD

Replacement Sensors Part # Examples:

HTO - **2A** 2%, Xmtr or No Temp, HT10 & AQ20

HTO - **2C** 2%, 100Pt RTD, HT10 & AQ20

HTO - **2D** 2%, 1000Pt RTD, HT10 & AQ20

HTO - **2E** 2%, 10K Type 2, HT10 & AQ20

HTO - **2F** 2%, 10K Type 3, HT10 & AQ20

HTO - **2K** 2%, 20K, HT10 & AQ20

HTO - **NA** 2% NIST, Xmtr or No Temp, HT10 & AQ20

HTO - **ND** 2% NIST, 1000Pt RTD, HT10 & AQ20

HTO - **3A** 3%, No Temp or Transmitter, HT10 & AQ20

HTO - **3C** 3%, 100Pt RTD, HT10 & AQ20


HTO - **3D** 3%, 1000Pt RTD, HT10 & AQ20

HTO - **3E** 2%, 10K Type 2, HT10 & AQ20

HTO - **3F** 3%, 10K Type 3, HT10 & AQ20

HTO - **3K** 3%, 20K, HT10 & AQ20

DIMENSIONS

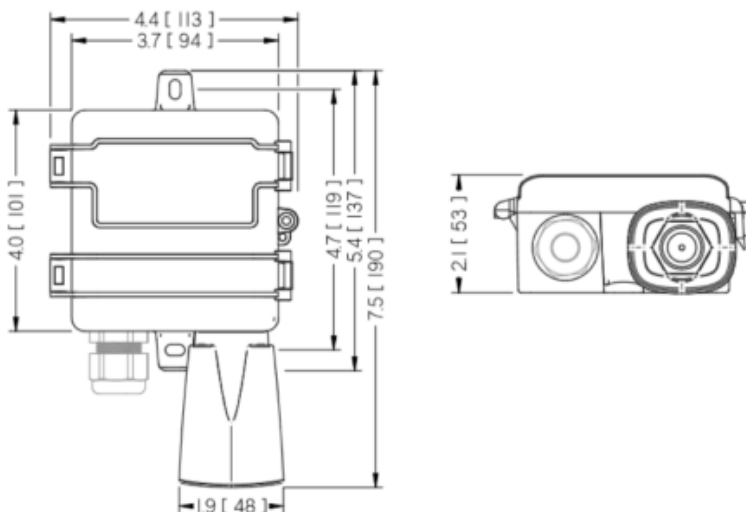

Warning: The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

SPECIFICATIONS		
Power Supply	AC Supply/DC Supply	24VAC, 100mA max./12-30VDC, 50mA max
Outputs	RH and Temperature)	3-wire 0-5/10V(4) or 2-wire 4-20mA
Output scaling	RH	0-100%RH
	Temperature	32-122°F (0-50oC) or-40-140°F (-40-60oC)
Thermistor/RTD	Optional	See ordering table
Relative Humidity	Accuracy	2% models, $\pm 2\%$ over 0 to 100% RH Range; $\pm 1.5\%$ typ
		3% models, $\pm 3\%$ over 0 to 100% RH Range; $\pm 2\%$ typ
	Resolution	0.01% RH
	Hysteresis	$\pm 0.8\%$ RH
	Non-Linearity	Factory linearized < 1% RH
	Temperature coefficient	Fully compensated by the onboard sensor
	Response time (2)	8s
	Output update rate	0.5s
	Operating range	0 to 100% RH (non-condensing)
	Longterm drift	< 0.25% RH per year
	Normal Operating Conditions (3)	41 to 140°F (5° C to 60°C) @ 20% to 80% RH
Temperature	Accuracy	2% models, $< \pm 0.25^\circ\text{C}$; 0.1°C typ @ 25°C
		3% models, $< \pm 0.3^\circ\text{C}$; 0.25°C typ @ 25°C
	Resolution	0.01°C
	Repeatability	0.08°C
	Response time (2)	2s
	Output date rate	0.5s
Enclosure	Materials	ABS/Polycarbonate
	Unit Temp Rating	-40 to 158o F (-40 to 70o F)
	Enclosure Rating	Nema 1; Add drain holes to enclosure bottom to achieve Nema 3R rating
Agency	Compliance	CE, RoHS

(1) One side of the transformer, secondary, is connected to the signal common. A dedicated transformer is recommended.

(2) Time for reaching 63% of reading at 25°C and 1m/s air flow.

(3) Long-term exposures to conditions outside the normal range at high humidity may temporarily offset the RH reading (+3% RH after 60 hours).

(4) 15-30VDC/24VAC power supply voltage required for 10 volt output.

*Product improvement is a continual process at Senva, and product features and specifications may change without prior notice. Refer to the instructions that accompany the product for installation and wiring.

** Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.*