

**INPUT**

12 VDC, 0.42 A  
24 VDC, 0.22 A

**LENS TAMPER**




N.C. DRY CONTACT  
0.05 A @ 12 VDC

**OPERATING TEMPERATURE**

-4°F TO 140°F (-20°C TO 60°C)

**CONTROL W/POWER SUPPLY**

- ALARM ON TRIGGER CLOSE

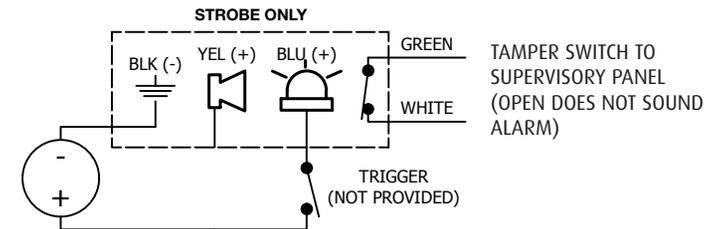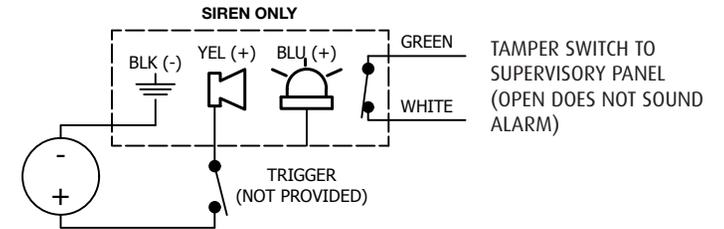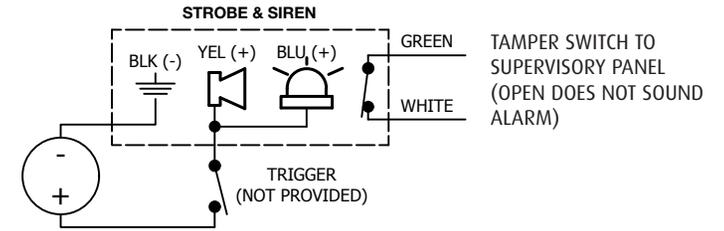

**Housing Installation**


1. Loosen screw with 3/32 HEX KEY.
2. Pull bottom of housing out and lift up until tabs are released from slots in top of siren/strobe assembly.

**Wire Connections**

WHITE - TAMPER  
GREEN - TAMPER  
BLUE - STROBE  
YELLOW - SIREN  
BLACK - GROUND

**⚠ WARNING:** This product can expose you to chemicals including Dichloromethane, which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Three year warranty or a one year limited warranty (from date of purchase) on most products. See website for details. Electronic warranty form at [www.sti-usa.com/wc14](http://www.sti-usa.com/wc14).

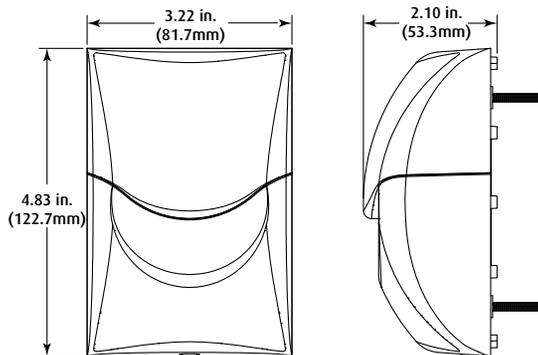

**INSTALLATION OF STI-SA5600 SELECT ALERT SIREN/STROBE**

All specifications and information shown were current as of publication and are subject to change without notice.



**S2 - STROBE CONTROL (1)**

1	2	3	4	5	6	7	8	9	FUNCTION
*	1	1	1						LEFT TO RIGHT FLASHING (30cyc/ 1 min)
	0	1	1						BREATHING ( 12cyc/1 min)
	1	0	1						FLASHING (120 cyc/1 min)
	0	0	1						FLASHING (90 cyc/1 min)
	1	1	0						FLASHING (60 cyc/1 min)
	0	1	0						INDIRECT FLASHING (50 cyc/1 min)
	1	0	0						INDIRECT FLASHING (30 cyc/1 min)
	0	0	0						CONTINUOUS (SOLID LIGHT)





**S2 - ALARM TONES (2)**

1	2	3	4	5	6	7	8	9	FUNCTION
*		1	1	1	1	1	1		1800Hz - 3300Hz @ 150ms
		0	1	1	1	1	1		500Hz - 1200Hz, 0.5s/ 0.5s OFF x 3/1.5s OFF (AS1670 EVACUATION)
		1	0	1	1	1	1		520Hz, 0.5s / 0.5s OFF x 3/1.5s OFF (FIRE)
		0	0	1	1	1	1		1200Hz - 500Hz @ 1Hz (DIN 33 404)
		1	1	0	1	1	1		500Hz - 1200Hz, 3.75s ON / 0.25s OFF (AS2220)
		0	1	0	1	1	1		550Hz/440Hz @0.5 Hz
		1	0	0	1	1	1		970Hz, 0.5s/ 630Hz, 0.5s
		0	0	0	1	1	1		800Hz / 1000Hz 0.5s each (1Hz)
		1	1	1	0	1	1		1500Hz - 2700Hz @ 3Hz
		0	1	1	0	1	1		800Hz / 970Hz @2Hz
		1	0	1	0	1	1		800Hz, 0.25s ON/ 1s OFF
		0	0	1	0	1	1		2400Hz - 2900Hz @ 9 Hz
		1	1	0	0	1	1		750Hz
		0	1	0	0	1	1		970Hz
		1	0	0	0	1	1		970Hz, 1s OFF/1s ON
		0	0	0	0	1	1		500Hz - 1200Hz, 3.5s ON/ 0.5s OFF (NEN 2575:2000 DUTCH SLOW WHOOP)
		1	1	1	1	0	1		800Hz - 970Hz @1Hz
		0	1	1	1	0	1		1000-2500Hz, 0.5s/ 0.5s OFF x 3/1.5s OFF (AS1670 EVACUATION)
		1	0	1	1	0	1		2850Hz, 0.5s ON/0.5s OFF x 3/1.5s OFF (ISO 8201)
		0	0	1	1	0	1		660Hz 1.8s ON/1.8s OFF
		1	1	0	1	0	1		500Hz - 1200Hz @ 0.33Hz
		0	1	0	1	0	1		250Hz - 1200Hz @ 12Hz
		1	0	0	1	0	1		2400Hz
		0	0	0	1	0	1		800Hz / 970Hz @9Hz
		1	1	1	0	0	1		510Hz, 0.25s/ 610Hz, 0.25s
		0	1	1	0	0	1		550Hz, 0.7s/1000Hz, 0.33s
		1	0	1	0	0	1		660Hz 0.15s ON/0.15s OFF
		0	0	1	0	0	1		800Hz - 970Hz @ 3Hz
		1	1	0	0	0	1		420Hz 0.625s ON/0.625s OFF (AUSTRALIA AS1670 ALERT TONE)
		0	1	0	0	0	1		554Hz, 0.1s/440Hz, 0.4s (AFNOR NF S 32 001)
		1	0	0	0	0	1		970Hz, 0.5s ON/0.5s OFF x 3/1.5s OFF (ISO 8201)
		0	0	0	0	0	1		2400Hz - 2900Hz @ 3 Hz

**S2 - VOLUME (3)**

1	2	3	4	5	6	7	8	9	FUNCTION
								1	VOLUME - HI
								0	VOLUME - LOW

\*Default

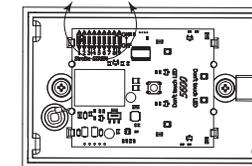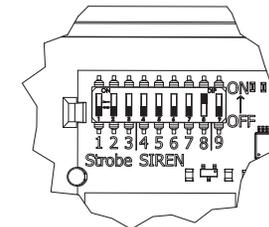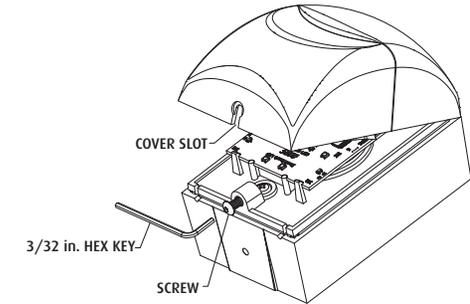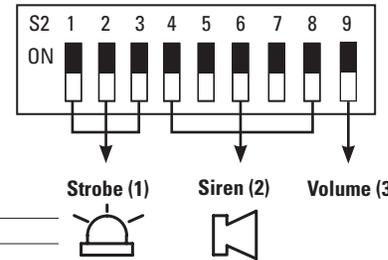

**INSTALLATION OF STI-SA5600 SELECT ALERT SIREN/STROBE**

All specifications and information shown were current as of publication and are subject to change without notice.